FASEP MADE IN ITALY

QUALCUNO DI CUI TI PUOI FIDARE

# WTTL8500W

Electro-Hydraulic
Heavy Duty
Wireless Mobile Columns

Manufaturer does everything in-house, from production and logistics to on-site delivery and installation. Our own technicians provide training and the initial inspection as well as after-sales service and annual inspections.

**All our products are CE certified.**

+ **Easy to use**
colour LCD display for extra support

+ **Zigbee wireless communication**
fast, reliable, and energy-efficient

+ **Short lifting time**

+ **Comes standard with forklift adapters**

+ **Each column is equipped with a separate charger** with 220-volt connection

+ **Each column is equipped with a lifting mechanism** for easy placement

+ **Flexible configuration: 1, 2, 4, 6 up to 12 columns** scalable for future expansions

+ **Ratchet locking mechanism**
much safer than a lock ladder system

+ **Simple, sustainable engineering**

+ **2-year warranty**

+ **5500 kg or 8500 kg per column**

+ **Rexroth hydraulics**

**The main hydraulic components are made by Rexroth, the recognized global leader in hydraulic components. This guarantees a long lifespan and minimal breakdowns.**

+ **Easily adjustable lift arms**

More than 500!! sold

# BENEFITS

- Easily adjustable lift arms.
- Special adaptors for moving with a forklift truck.
- Simple touchscreen operation.
- High-resolution display.
- Each column can be configured as a 'master' or a 'slave' for unlimited column coupling flexibility.

SPECS

| | WTTL8500W |
|---|---|
| Capacity | 8500 kg |
| Minimum lifting height | 0 mm |
| Maximum lifting height | 1700 mm |
| Lifting time | 90 s |
| Lowering time | 60 s |
| Minimum arm length | 252 mm |
| Maximum arm length | 540 mm |
| Column height: | 2465 mm |
| Maximum total height | 3730 mm |
| Full battery charge cycle | 15 |
| Maximum column combination | 12 |
| CE certified | Yes |

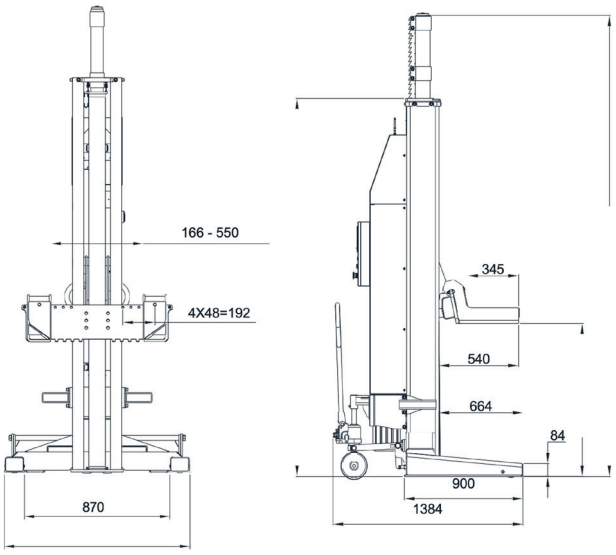


**WTTL8500W** dimensions

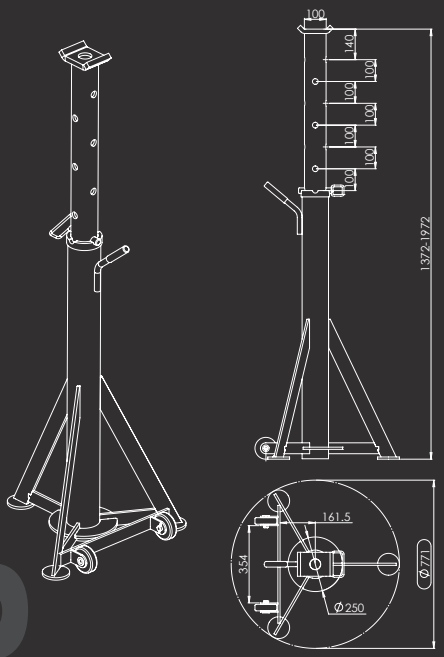


- **Wheels** and **convenient handle** for easy placement.
- Height can be easily adjusted; the guided posts are supported by a **powerful spring**.
- Easy height adjustment from **1732 t/m 1972 mm.**

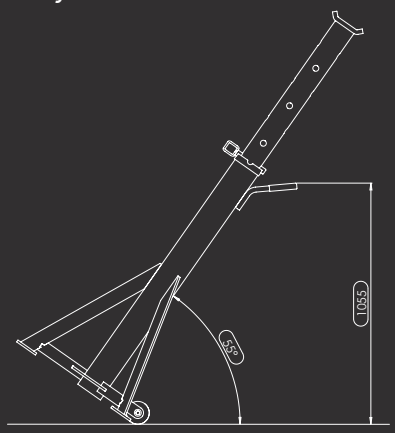


# OPTIONS

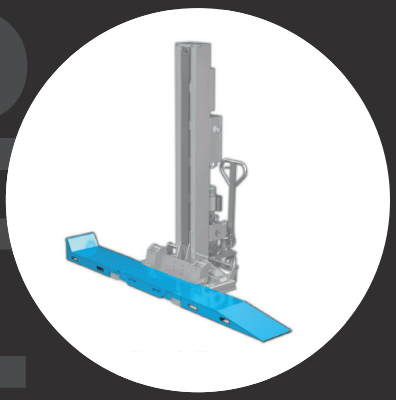

**FORKLIFT FOR PLATFORMS**
5.5 tonnes | 8.5 tonnes

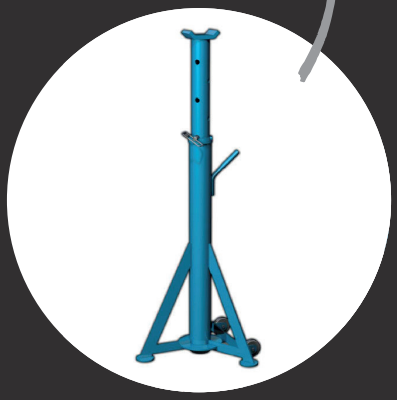

**AXLE SUPPORTS**
8.5 tonnes
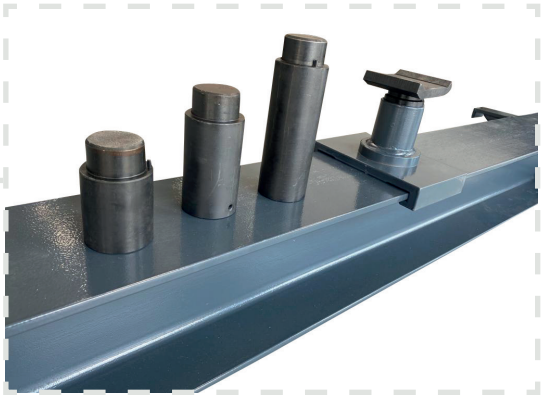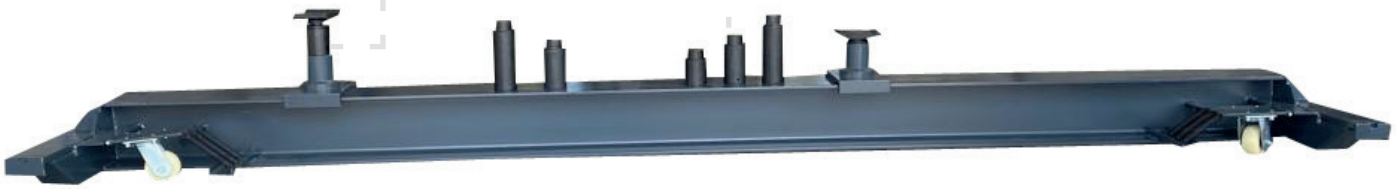
**AGRI & TRAILER SUPPORT**